

Flotex planks meet the requirements of EN 1307


Description	Flocked flooring
 Total thickness ISO 1765	5.3mm
 Tile dimensions	100 x 25cm. Tiles per box: 10 (2.5 m ²)
Collection size	6
 Application EN685	Class 33 heavy
 Total weight	5.4 kg / m ²
 Absasion resistance EN1307 annex F	> 1000 cycles
 Slip resistance Pendulum test	DRY - very low slip risk. WET - Low slip risk
 Impact sound EN-ISO 717-2	Impact sound ΔLw = 19 dB
 Sound absorption	0.10

 Water tightness	Pass
 Castor chair use EN 985	Minimum R value: ≥2.4 continuous use
 Creating Better Environments	
 Renewable Electricity	Flotex is manufactured using 100% electricity made from renewable sources
 Recycled content	Flotex planks contain approximately 52% recycled content by weight.
 Back to the Floor	Installation off cuts can be collected and recycled via Back to the Floor

Flotex Planks meet the requirements of EN 14041



 Reaction to fire EN 13501	B _{fl} -s1
 Slip resistance EN 13893	DS: ≥0.30
 Body voltage ISO 6356	2kV
Thermal conductivity EN 12524	0.040 W/m·k

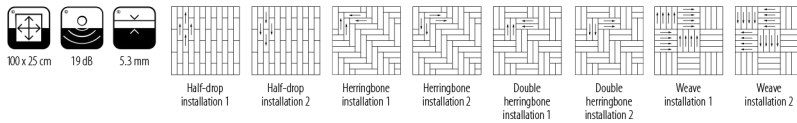

Usage classification

☒ Superior appearance rating
 ☐ Good appearance rating
 ☐ Moderate appearance rating



111001 | pearl

LRV 26



111003 | almond

LRV 19



111002 | cement

LRV 13



111004 | charcoal

LRV 9



111005 | walnut

LRV 8



111006 | liquorice

LRV 5



Please note: Digital representations may vary from the actual product. Please order a sample to see the full effect. Contact 0800 731 2369.