

AZM PEARL ECO LOOSLAY LVT

Tehnnical Parameter			
Characteristics	Test Method	Drayback	Looslay
Dimension	EN427	45x92 cm /18x121 cm/ 22x121 cm	45x92 cm /18x121 cm/ 22x121 cm
Thickness in total	EN428	2,5mm	5,0mm
Thickness of wear layers	EN429	0,5mm / 0,70mm	0,5mm / 0,70mm
Total weight	EN430	9≥kg/m²	9≥kg/m²
Peeling stength of layers	EN431	pass	pass
Shear forces of layer	EN432	Good	Good
Shrinkage and bending	EN434	Shrinkage<0,1 % curling < 2mm	Shrinkage<0,1 % curling < 2mm
Elastic bending	EN434	No damage	No damage
Chemical corrosion	EN423	class 0	class 0
Residual indentation after staticc load	EN433	0,1 mm	0,1 mm
Bearing a castor chair	EN435	No disturbance No delamination	No disturbance No delamination
Color fastness	ISO 105B02	>6	>6
Wearability	EN660	pass	pass
Toxic element test	EN71-3	Complies	Complies
Flame rating	ASTM E84-03	NFPA class B	NFPA class B
Nonskid property	DIN 51130	R9	R9
Performance classification	EN685	23,34,43	23,34,43
PVC block material performance testing GB8624 B1 grade flammability test		pass	pass
CNS 8907 andi-flaming testing		pass	pass

*Made in Belgium



Vadi İstanbul Bulvar 2A Ofis | Ayazağa Mah.
Azerbaycan Cad. No: 3/1 Daire: 15-16 Sarıyer / İSTANBUL
+90 212 274 44 22 • +90 274 42 89 • +90 212 274 42 90
+90 212 274 42 80
+90 530 523 52 73
www.anilzemin.com
info@anilzemin.com




AZM PEARL ECO LOOSLAY LVT



AZM PEARL ECO LOOSLAY LVT



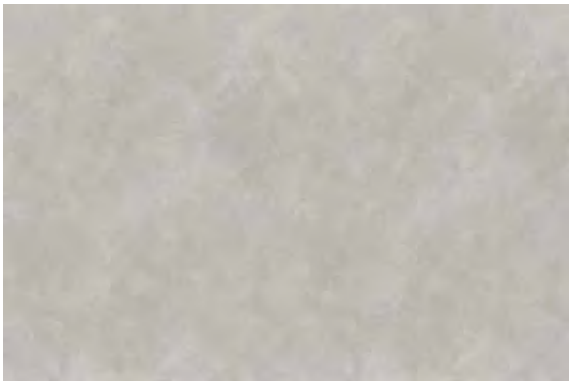

45700-10
LOOSELAY 5,0mm. / 0,55 mm.-0,70mm.
DRYBACK 2,5mm. / 0,55 mm. -0,70mm.



45700-11
LOOSELAY 5,0mm./ 0,55 mm.-0,70mm.
DRYBACK 2,5mm. / 0,55 mm. -0,70mm.



45700-12
LOOSELAY 5,0mm./ 0,55 mm.-0,70mm.
DRYBACK 2,5mm. / 0,55 mm. -0,70mm.



451065- 25
LOOSELAY 5,0mm./ 0,55 mm.-0,70mm.
DRYBACK 2,5mm. / 0,55 mm. -0,70mm.



451065-28
LOOSELAY 5,0mm./ 0,55 mm.-0,70mm.
DRYBACK 2,5mm. / 0,55 mm. -0,70mm.



45237-10
LOOSELAY 5,0mm./ 0,55 mm.-0,70mm.
DRYBACK 2,5mm. / 0,55 mm. -0,70mm.



45299-03
LOOSELAY 5,0mm./ 0,55 mm.-0,70mm.
DRYBACK 2,5mm. / 0,55 mm. -0,70mm.



452087-08
LOOSELAY 5,0mm./ 0,55 mm.-0,70mm.
DRYBACK 2,5mm. / 0,55 mm. -0,70mm.



451065-33
LOOSELAY 5,0mm./ 0,55 mm.-0,70mm.
DRYBACK 2,5mm. / 0,55 mm. -0,70mm.



456501-10
LOOSELAY 5,0mm./ 0,55 mm.-0,70mm.
DRYBACK 2,5mm. / 0,55 mm. -0,70mm.



458103-01
LOOSELAY 5,0mm./ 0,55 mm.-0,70mm.
DRYBACK 2,5mm. / 0,55 mm. -0,70mm.




458115-06
LOOSELAY 5,0mm./ 0,55 mm.-0,70mm.
DRYBACK 2,5mm. / 0,55 mm. -0,70mm.



458135-05
LOOSELAY 5,0mm./ 0,55 mm.-0,70mm.
DRYBACK 2,5mm. / 0,55 mm. -0,70mm.



45640 DRY WAVES 22cm. x 121 cm.
LOOSELAY 5,0mm./ 0,55 mm.-0,70mm.
DRYBACK 2,5mm. / 0,55 mm. -0,70mm.

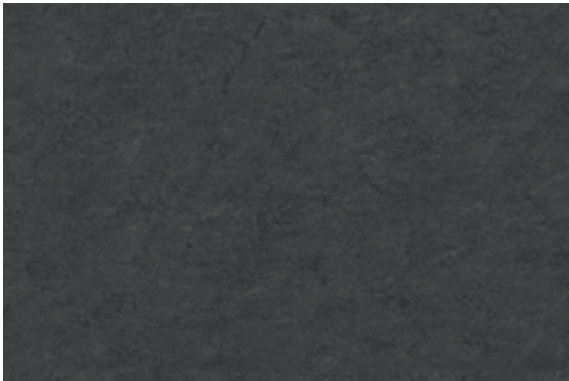

45994-17
LOOSELAY 5,0mm./ 0,55 mm.-0,70mm.
DRYBACK 2,5mm. / 0,55 mm. -0,70mm.



452234-9
LOOSELAY 5,0mm./ 0,55 mm.-0,70mm.
DRYBACK 2,5mm. / 0,55 mm. -0,70mm.



Backing

