



Textile Flocked Flooring

flotex® advance



25 x 2 m



50 x 50 cm

creating better environments

Forbo
FLOORING SYSTEMS



flotex[®] advance

Flotex Advance, creating contemporary spaces

The Flotex Advance collection features 2 new designs, Latitude and Code, both designed specifically to create a contemporary feel within any space. These designs offer a versatile blend of aesthetics and functionality. Whether it's the calming watermark inspired design of Latitude or the 'type' inspired pattern of Code, the Flotex Advance collection aims to enhance the ambiance of any environment while promoting creativity and style.

When you choose Flotex, you're not just choosing a flooring; you're choosing a statement of style, and a solution which is easy to live with thanks to its special performance and durability. Explore the Flotex Advance collection and experience the perfect synergy of form and function in your space.

The Flotex Advance collection is available in sheet and tiles, for endless installation possibilities.

Flotex Advance sheet with innovative Next backing for loose-lay or glued installation.

Thanks to its Next backing, the Flotex Advance sheet can be effortlessly installed without the need for adhesive, making it a time and cost-saving solution for both new construction and renovation projects.

Flotex Advance sheet is also suitable for glued installation.

DURABLE

- With the feel of a textile floor covering, together with the hard wearing and durable characteristics of a resilient floor, Flotex is the best of both worlds.
- Compared to a traditional carpet, the densely flocked surface of nylon 6.6. fibres brings higher durability, so that your vision of your space will last.

EASY TO CLEAN

- Premium quality nylon 6.6. fibres bring superior stain resistance and cleanability.
- Unlike traditional carpet the unique construction of densely flocked straight pile allows stains to effortlessly release in any cleaning action in both dry and wet conditions.


HYGIENE AND INDOOR AIR QUALITY

- The 80 million vertical fibres of Flotex capture and hold fine dust and allergens which can then be released by simply vacuuming.
- The waterproof backing of Flotex forms a barrier so that spillages cannot penetrate to the sub-floor. This limits the possibility of bacterial growth, mould and odours.
- Contributing to better indoor air quality, Flotex is the only textile floor covering which carries the seal of approval from the British Allergy Foundation.

ACOUSTIC AND SAFE

- Thanks to both its impact sound reduction and sound absorption performance, Flotex brings a quiet atmosphere, reduces stress, boosts concentration and creates peaceful environments in any spaces.
- Flotex has a good slip resistance reducing the risk of accidents or injuries in wet or dry conditions so that spaces are safe places for people.



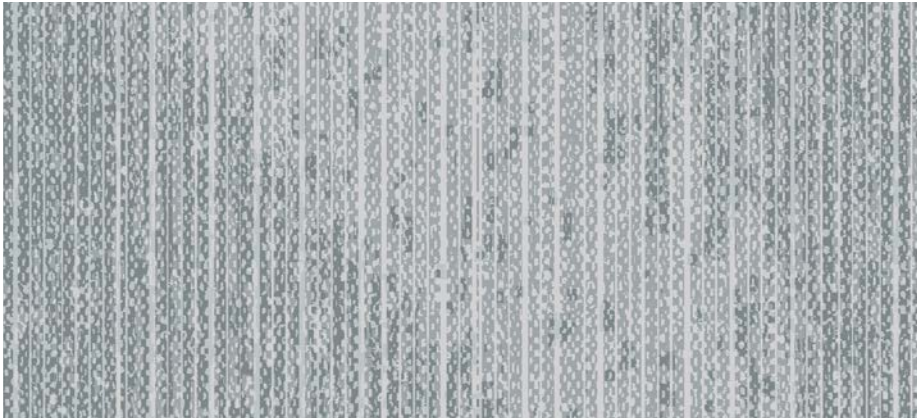

latitude | nickel
s202018 t302018

LRV 22%
◐




latitude | linen
s202049 t302049

LRV 17%
●




latitude | sand
s202077 t302077

LRV 20%
●

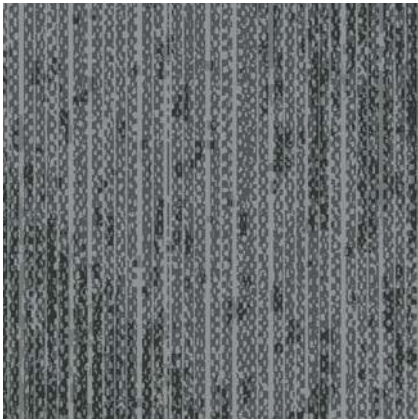

latitude | grey
s202037 t302037

LRV 7%
◐

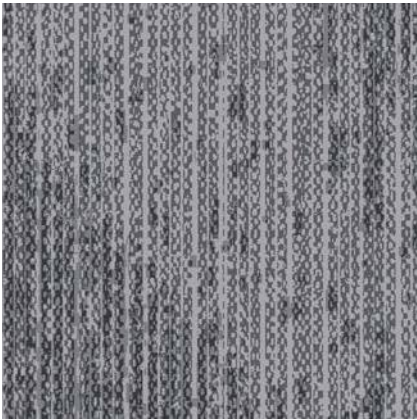


latitude | nimbus
s202073 t302073

LRV 9%
◐




latitude | juniper
s202001 t302001

LRV 10%
◐

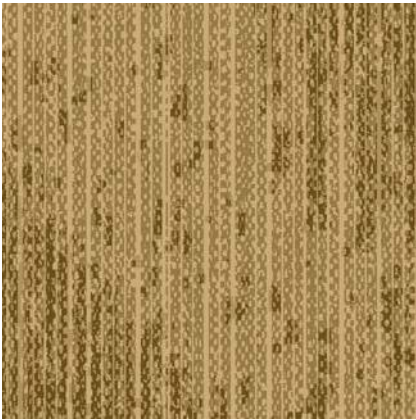


latitude | mustard
s202002 t302002

LRV 12%
◐

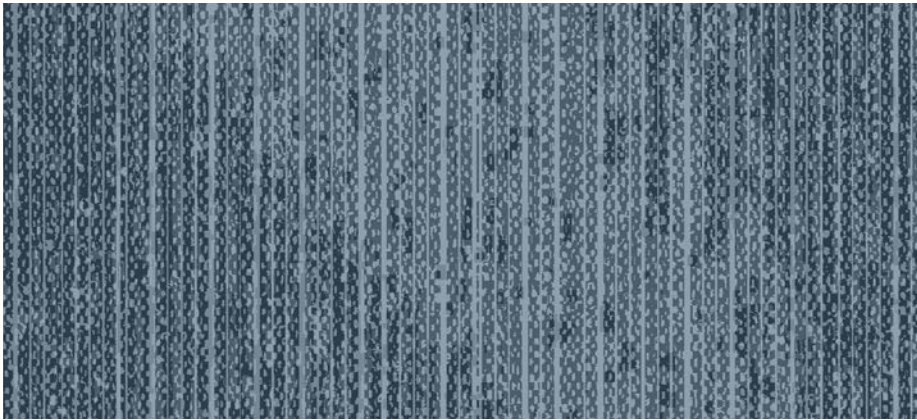

latitude | gull
s202044 t302044

LRV 8%
◐

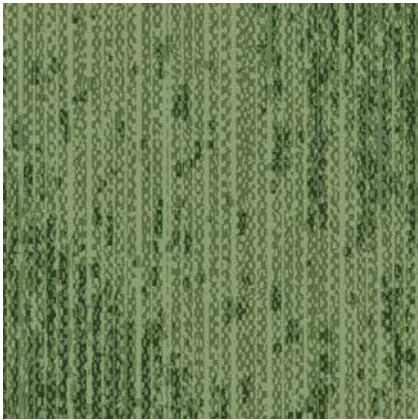


latitude | cypress
s202003 t302003

LRV 9%
◐




latitude | claret
s202004 t302004

LRV 6%
◐

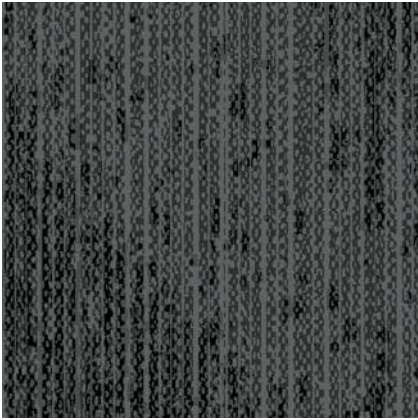


latitude | ash
s202031 t302031

LRV 4%
○

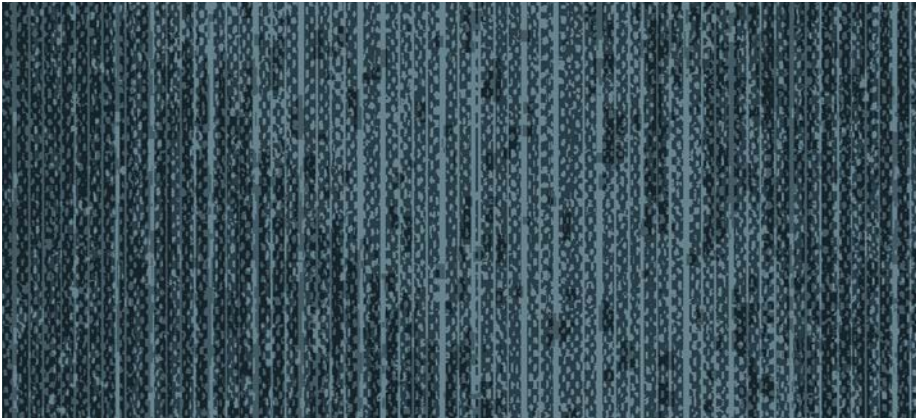

latitude | tempest
s202110 t302110

LRV 5%
○

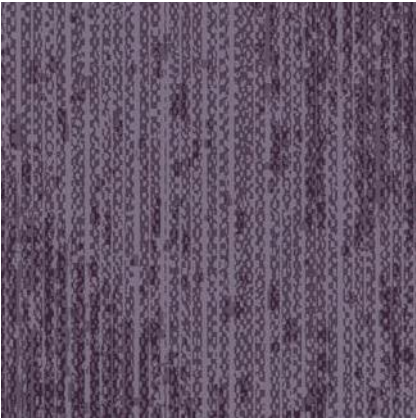

latitude | thistle
s202005 t302005

LRV 5%
◐



s203018 | code nickel s203002 | code pewter



code | nickel LRV 26%
s203018 t303018 ●



code | ice LRV 20%
s203001 t303001 ●



code | pewter LRV 14%
s203002 t303002 ●



code | gull LRV 13%
s203044 t303044 ●



code | nimbus LRV 14%
s203073 t303073 ●




code | oxide LRV 10%
s203003 t303003 ◐




code | cornflower LRV 8%
s203004 t303004 ◐



code | ash LRV 5%
s203031 t303031 ○

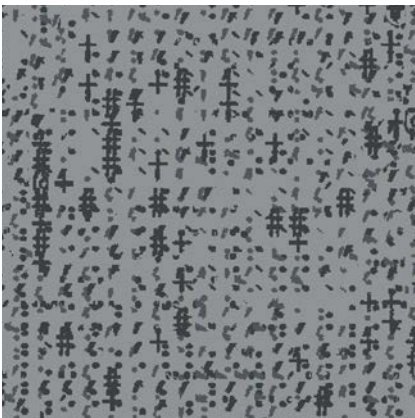

code | grey LRV 11%
s203037 t303037 ●

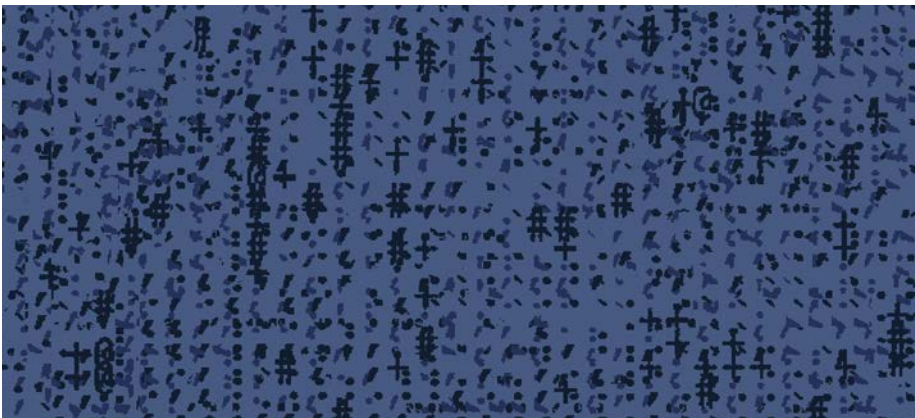

code | azure LRV 5%
s203116 t303116 ◐

flotex® code

s = sheet
s =  25 x 2 metres

t = tiles
t =  50 x 50 cm

○ = superior
appearance
rating

◐ = good
appearance
rating

● = moderate
appearance
rating




code | tempest
s203110 t303110

LRV 9%
●



code | mineral
s203084 t303084

LRV 19%
●

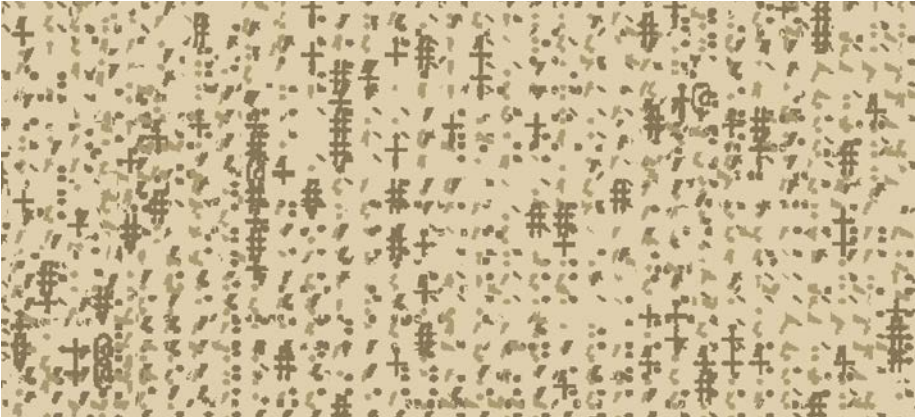

code | sand
s203077 t303077

LRV 26%
●



s203110 | code tempest



code | spearmint
s203005 t303005

LRV 15%
●




code | honey
s203006 t303006

LRV 19%
●




code | moss
s203087 t303087

LRV 10%
●

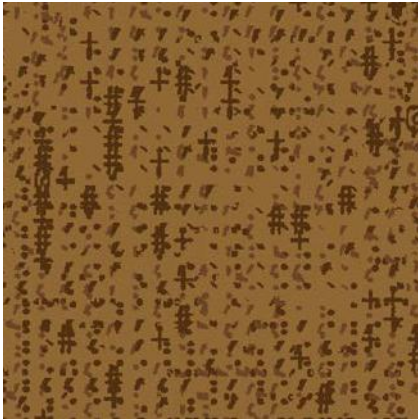


code | apricot
s203007 t303007

LRV 7%
○

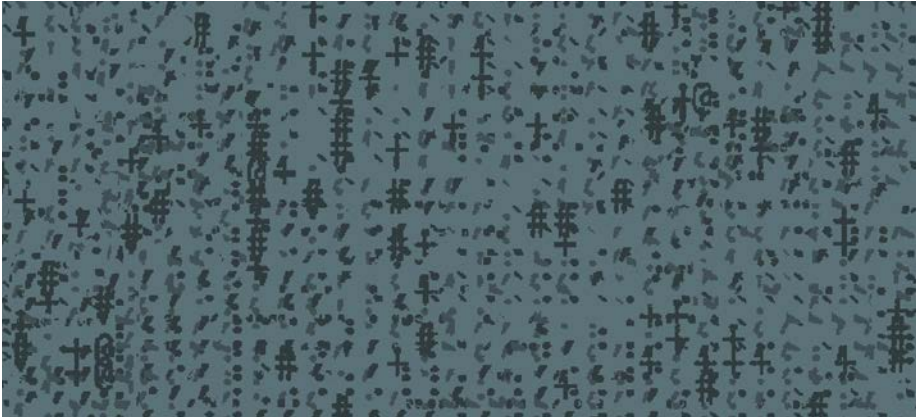


code | carbon
s203080 t303080

LRV 7%
◐

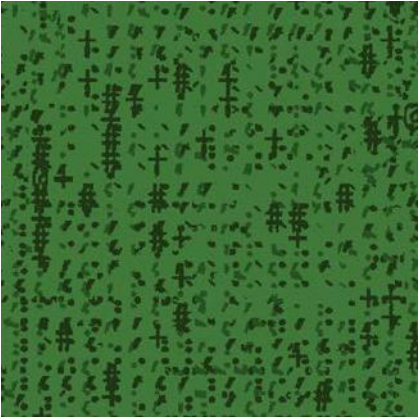


code | evergreen
s203088 t303088

LRV 7%
◐

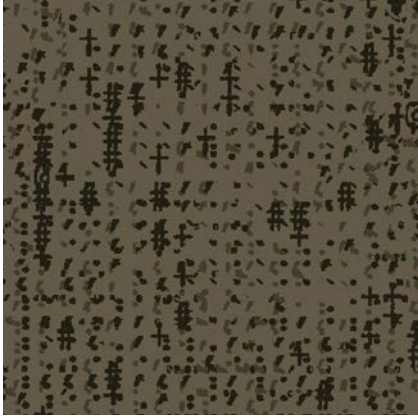


code | concrete
s203079 t303079

LRV 5%
○

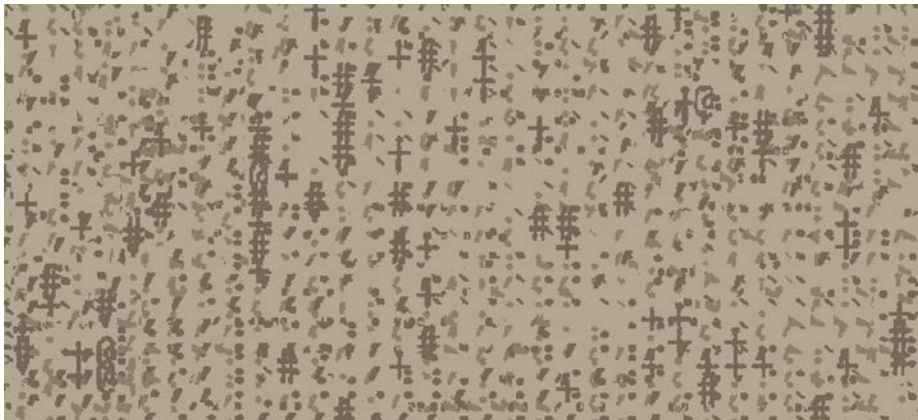

code | pumice
s203009 t303009

LRV 16%
●

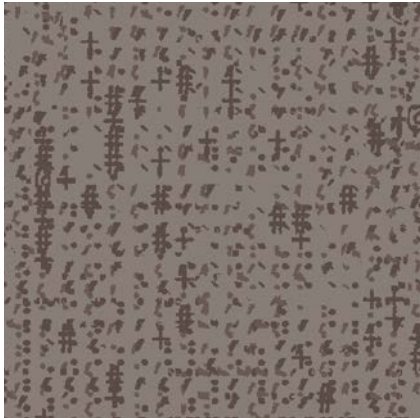


code | mauve
s203008 t303008

LRV 9%
◐



code | linen
s203049 t303049

LRV 23%
●

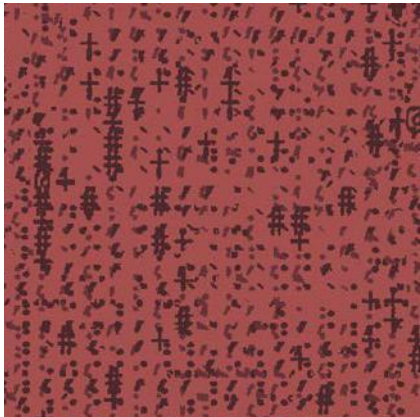

code | berry
s203083 t303083

LRV 7%
◐



code | plum
s203010 t303010

LRV 7%
◐



code | grape
s203082 t303082

LRV 7%
◐



s203008 | code mauve s203049 | code linen



Technical specifications

Flotex sheet & tiles meet the requirements of EN 1307



	Flotex advance sheet		Flotex advance tile	
	Total thickness	ISO 1765	3,9 mm	5,0 mm
	Total weight	ISO 8543	2,150 g/m²	4,800 g/m²
	Pile composition		100% polyamide 6.6	100% polyamide 6.6
	Commercial use	EN-ISO 10874	Class 33	Class 33
	Sheet roll width		2.0 m	–
	Sheet roll length		± 25 m	–
	Tile size		–	50 x 50 cm
	Packaging per carton tiles		–	12 (3 m²)
	Dimension stability	ISO 2551 / EN 986	≤ 0.1%	≤ 0.1%
	Abrasion resistance	EN 1307 annex F	> 1000 cycles	> 1000 cycles
	Castor chair continuous use	ISO 4918	r ≥ 2.4	r ≥ 2.4
	Colour fastness to light	EN-ISO 105-B02	≥ 5	≥ 5
	Slip resistance	BS 7976-2 (UK SRG pendulum)	Dry - low slip risk Wet - low slip risk	Dry - low slip risk Wet - low slip risk
	Acoustic impact noise reduction	EN-ISO 717-2	ΔL _w ≥ 20 dB	ΔL _w ≥ 19 dB
	Acoustic sound absorption	ISO 354	α _w = 0.10 (H)	α _w = 0.10 (H)
	Water impermeability	EN 1307 annex G	Pass	Pass
	Creating Better Environments			
	Renewable electricity	Flotex is manufactured using 100% electricity made from renewable sources.		
	Recycled content	Flotex advance sheet contains up to 21,8% recycled content by weight. Flotex tile contains up to 59% recycled content by weight.		
	Indoor air quality	Flotex is approved by Allergy UK . All Flotex products are tested for indoor air emissions in accordance with EN 16516 after 3 days and 28 days. Flotex advance sheet has low emissions.		
	Indoor Emissions: TVOC after 28 days	EN 16516	≤ 0.1 mg/m³	≤ 0.1 mg/m³
	SKA	Flotex meets SKA Rating criteria for M12 for soft floor coverings in office, retail and higher education schemes.		
	LCA	Life Cycle Assessment is the foundation for securing the lowest environmental impact.		
	Flotex meets the requirements of EN 14041:2004	EN 14041:2004  1200401- DoP - 210	EN 14041:2004  1200201- DoP - 101	
	Great Britain Only Flotex meets the requirements of BS EN 14041:2004	BS EN 14041:2004  1200401- DoP - GB210	BS EN 14041:2004  1200201- DoP -GB108	
	Reaction to fire	EN 13501-1	B _s -s1, L, NCS	B _s -s1, L, CS
	Slip resistance	EN 13893	μ ≥ 0.30	μ ≥ 0.30
	Body voltage	ISO 6356	≤ 2.0 kV	≤ 2.0 kV
	Thermal conductivity	EN 12524	0.06 W/mK	0.06 W/mK
	Content of specific dangerous substances	EN 14041	Compliant	Compliant

Flotex Advance sheet can be installed loose laid using a double side adhesive tape (Forbo Modul'up ref 792) at the seams and at door thresholds, or Flotex Advance sheet can be fully glued with our recommended adhesive 640 Eurostar special. Our recommended tackifier for Flotex tiles is 542 eurofix tack plus. Please contact customer services for more information. All Forbo Flooring Systems' sales organisations worldwide have a certified Quality Management System in accordance with ISO 9001. All Forbo Flooring Systems' manufacturing operations have a certified Environmental Management System in accordance with ISO 14001. The Life Cycle Assessment (LCA) of Forbo Flooring Systems' products is documented in individual Environmental Product Declarations (EPD's) which can be found on all of our websites.



Find us on



Belgium

Forbo Flooring
't Hofveld 4B 001
1702 Groot-Bijgaarden
Tel: +32 2 464 10 10
Fax: +32 2 464 10 11
info.belgium@forbo.com
www.forbo-flooring.be

Norway

Forbo Flooring A/S
Hagalokkveien 7
1383 Asker
T +66 77 12 00
F +66 77 12 40
info.norway@forbo.com
www.forbo-flooring.no

Other Countries

Forbo Flooring B.V.
P.O. Box 13
1560 AA Krommenie
The Netherlands
T: +31 75 647 74 77
E-mail: question@forbo.com
www.forbo-flooring.com



FLOORING SYSTEMS

creating better environments