




Textile Carpet Tiles


tessera[®] create space 1

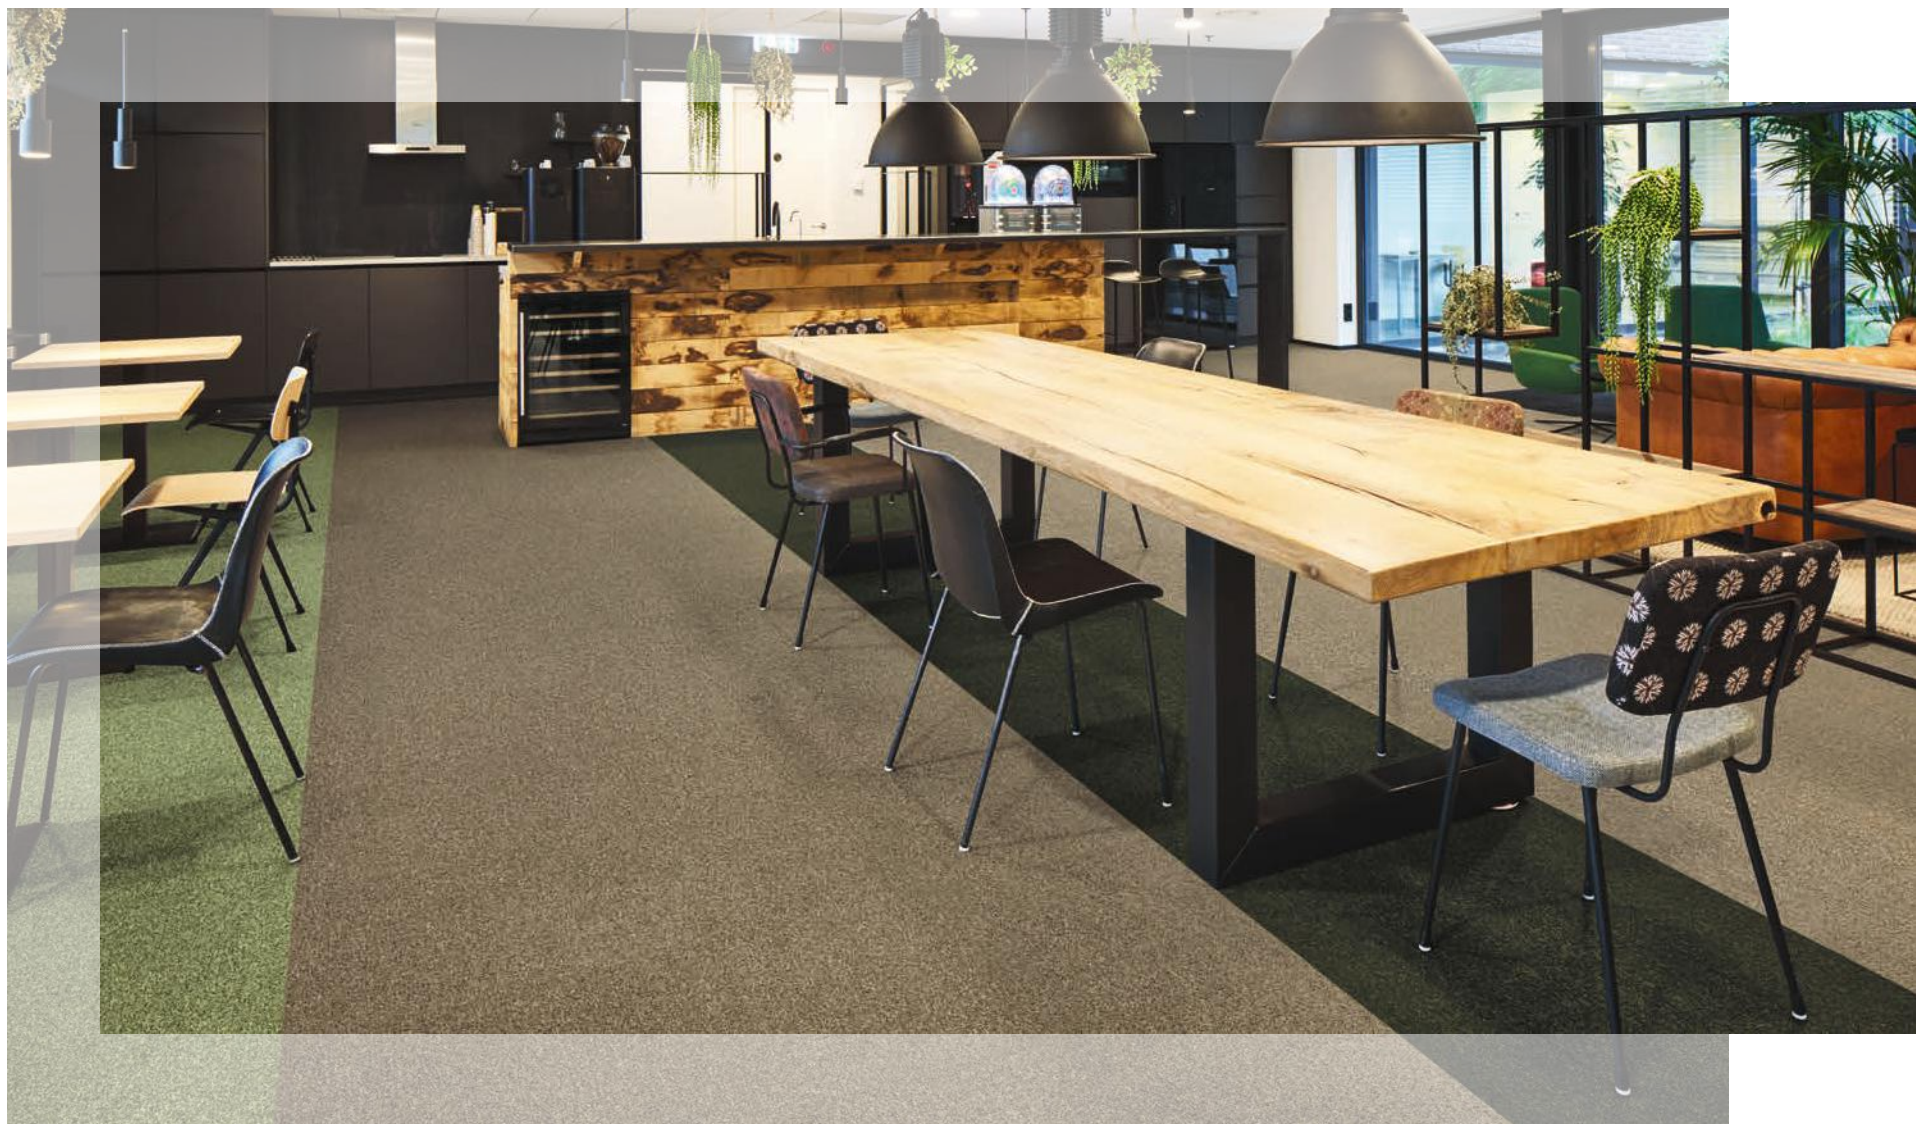

50 x 50 cm

creating better environments

forbo
FLOORING SYSTEMS

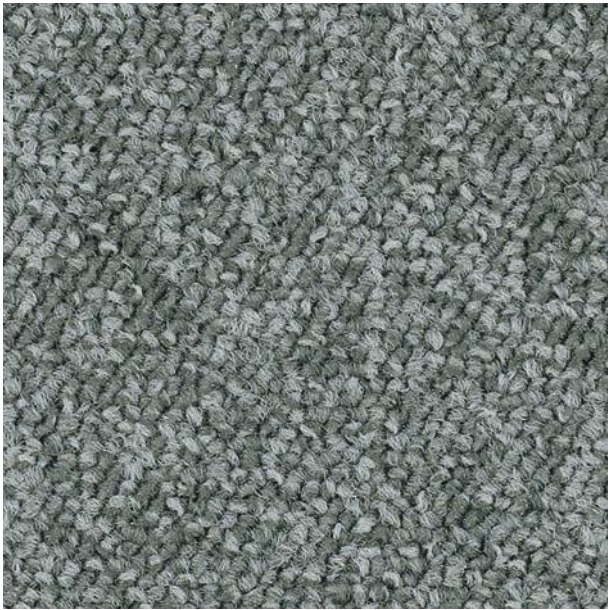


1818 | pearl LRV 19%



1804 | opal LRV 20%



1819 | jasper LRV 25%

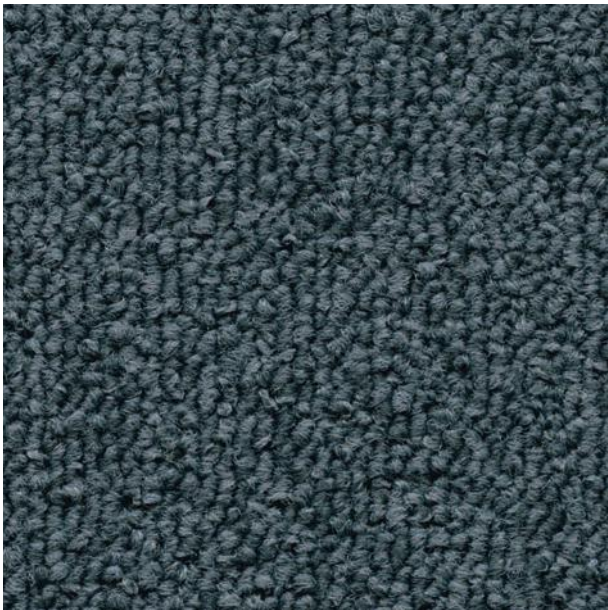


1801 | feldspar LRV 7%




1816 | lithium LRV 10%



1807 | tawny LRV 13%

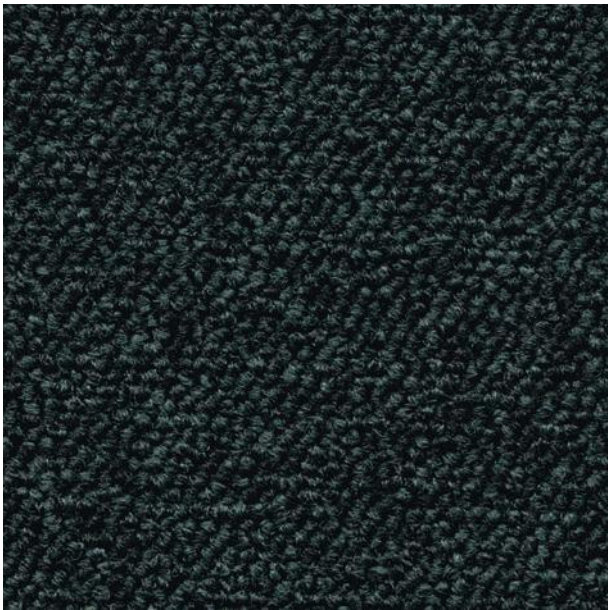

1800 | ebonite LRV 3%

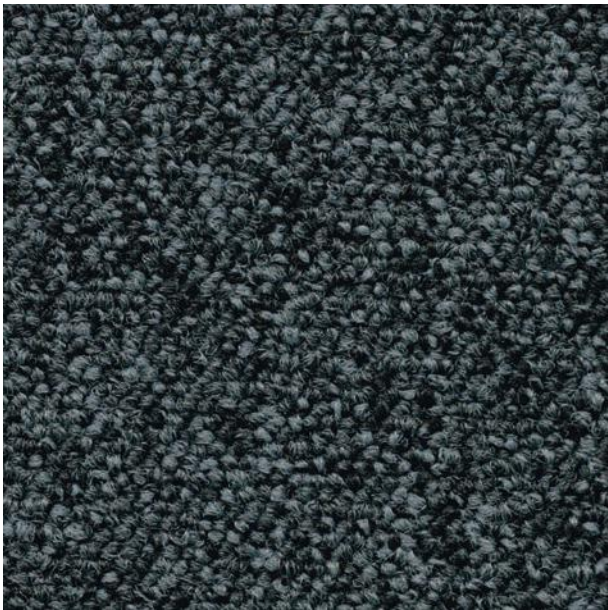


1815 | hematite LRV 5%



1820 | agate LRV 8%



1821 | citrine LRV 18%

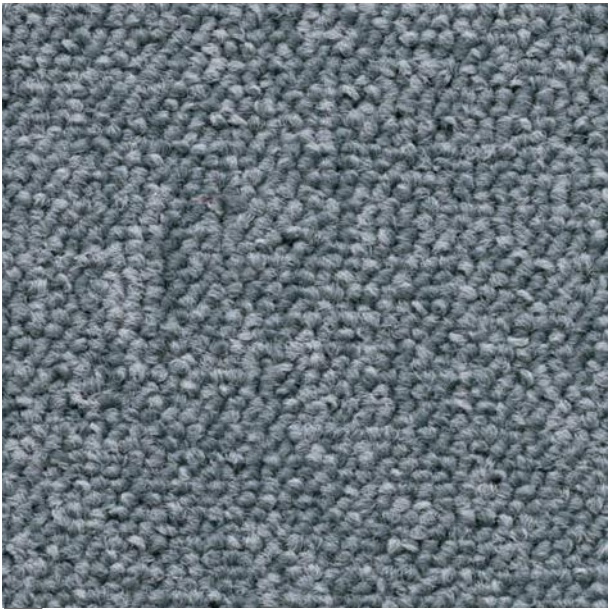

1813 | nickel LRV 19%




1822 | sunstone LRV 19%



1823 | jadeite LRV 17%




1824 | kyanite LRV 10%

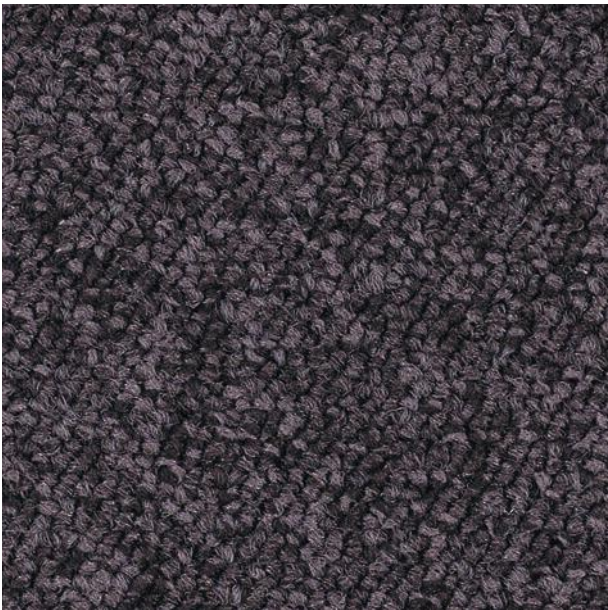


1825 | spinel LRV 8%



1826 | serpentine LRV 7%

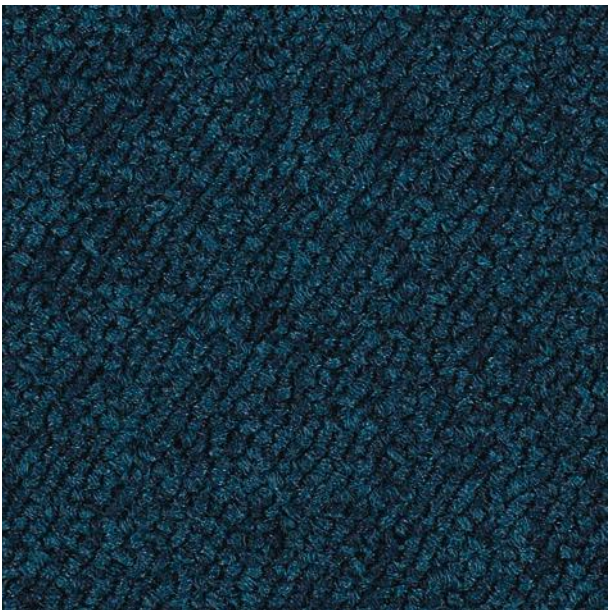

1827 | lazulite LRV 5%

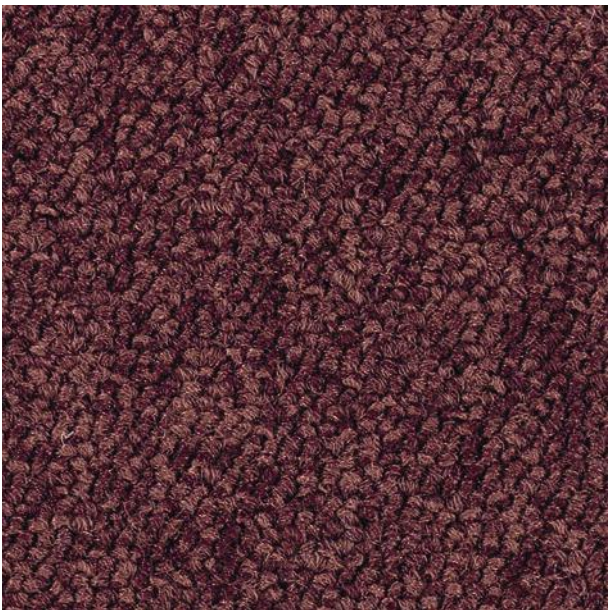

1828 | garnet LRV 6%





tessera® create space 1

An exceptionally flexible range of 18 commercial colourways, Create Space 1 is suitable for any commercial interior, large or small. Styled for today's interiors, Create Space 1 lends itself to single colourway installations, feature area designs and bespoke creative schemes.

Designed for heavy contract installations and constructed using regenerated solution dyed ECONYL® polyamide, Create Space 1 loop pile carpet tiles are not only tough and durable but also respond to globally increasing environmental concerns.

- 18 semi-plain loop pile colourways
- Can be laid monolithic, quarter turn or tessellated
- 100% regenerated ECONYL® polyamide in each colourway
- Suitable for multiple installation options
- Manufactured in the UK and suitable for heavy contract use
- Meets Ska rating criteria for M12 soft floor coverings
- 10 year guarantee
- Also available with SOFTbac® secondary backing

Technical specifications

Create Space 1 carpet tiles meet the requirements of EN 1307

	Description	Tufted low level loop carpet tile	
	Dimensions	EN 994	50cm x 50cm
	Total thickness	ISO 1765	5.5mm
	Pile height	ISO 1766	2.7mm
	Collection size	18	
	Packaging per carton of tiles	20	
	Commercial use	EN ISO 10874	Class 33, Suitable for any type of heavy contract application
	Pile composition	100% ECONYL® regenerated polyamide 6	
	Dye method	100% solution dyed	
	Stitch density	ISO 1763	212,760 per m²
	Pile weight	ISO 8543	500gsm ± 10%
	Total weight	3,815gsm	
	Primary backing	Polyester	
	Secondary backing	ProBac recycled mineral filler with low amount of modified bitumen and polyester fleece. Contains over 76% recycled content.	
	Acoustical impact noise reduction	ISO 717-2	25 dB
	Acoustical sound absorption reduction	ISO 354	0.15
	Castor chair continuous use	ISO 4918	≥ 2.4
	Colour fastness to light	ISO 105-B02	≥ 5
	Dimensional stability	EN 986	≤ 0.2 %
	Creating Better Environments		
	Renewable energy	All Tessera carpet tiles are manufactured using 100% renewable energy (electricity & biogas)	
	Recycled content	Create Space 1 carpet tiles contain 70% recycled content by weight	
	Indoor air quality	Create Space 1 carpet tiles products comply to 01350 Indoor Air Quality Standard	
	Ska rating	Create Space 1 meets Ska Rating criteria for M12 soft floor coverings in office, retail and higher education schemes	
	Prodis-GUT	www.pro-dis.info	3B5DACDB
	Installation method	Monolithic, quarter turn or tessellated	
Meets the requirements of EN 14041:2004			
	DOP	EN 14041	1170100-DOP-306
	Reaction to fire	EN 13501-1	B _{f1} -s1, G, NCS
	Slip resistance	EN 13893	μ ≥ 0.30
	Thermal conductivity	EN 12524	0.06 W/m.k
	Body voltage	ISO 6356	< 2.0kV

BREEAM ratings

Tessera – Create Space 1 – Carpet Tiles (EN1307)

Commercial	Education	Health	Domestic	Retail (Durability)	Retail (Fashion)
A	A+	A+	A	A	A+

All Forbo Flooring Systems’ sales organisations and manufacturing sites worldwide have certified Quality Management Systems in accordance with ISO 9001.

All Forbo Flooring Systems’ manufacturing plants have certified Environmental Management Systems in accordance with ISO 14001.

Tessera Create Space 1 carpet tiles are manufactured in a facility certified to SA8000® and OHSAS 18001.

The Life Cycle Assessment (LCA) of Forbo Flooring Systems’ products is documented in individual Environmental product declarations (EPD's) or local building rating schemes such as BREEAM.

Colourway choice

As with any product, colour and design influence the appearance retention of the floor. The level and type of traffic should be considered as part of the process for selecting colourways. Light colours may not be suitable for heavy traffic areas.

Installation and maintenance

Shades may vary from batch to batch and should be checked before installation. Batches should not be mixed in the same location. All Tessera products are to be installed in full accordance with Forbo installation instructions and recognised trade standards.

Our recommended adhesive for our collection of Tessera carpet tiles is 542 Eurofix Tack Plus.

A well designed entrance flooring system will prevent dirt and moisture from being tracked into the building, prolonging the life of the carpet tiles, reducing cleaning, repair and overall maintenance costs. Forbo Coral and Nuway entrance systems are independently proven to remove and retain up to 95% of all dirt and moisture entering a building. Please contact customer services for more information.

Regular vacuuming is essential (using a high suction power driven brush vacuum). Spills and surface stains can be removed by sponging with a damp cloth or, for more resistant stains, with a mild detergent solution. For full installation and cleaning and maintenance instructions please go to www.forbo-flooring.com

The Netherlands

Forbo Flooring B.V.
Postbus 13
1560 AA Krommenie
T: (075) 647 78 80
F: (075) 628 37 71
contact@forbo.com
www.forbo-flooring.nl

Portugal

Forbo-Revestimentos, SA
Zona Industrial da Maia I, Sector VII
Tv. Eng. Nobre da Costa, 87
Apartado 6091
4476-908 Maia
T: +351 229 996 900
F: +351 229 996 909 info.
revestimentos@forbo.com
www.forbo-flooring.com.pt

Other countries

Forbo Flooring B.V.
P.O. Box 13
1560 AA Krommenie
The Netherlands
T: +31 75 647 74 77
F: +31 75 647 77 01
contact@forbo.com
www.forbo-flooring.com

Find us on



creating better environments



FLOORING SYSTEMS