

# RAY PATH - SPECTRUM COLLECTION

## Technical Specifications

**Construction:** Multi-level Loop

**Fiber:** ECONYL® Regenerated Nylon by Aquafil

**Gauge:** 1/10"

**Stitches:** 10 per inch

**Area per carton:** 5m<sup>2</sup>

**Traffic Classification:** Commercial - Heavy Duty

**Average Pile Height:** 4.0 ± 0.5 mm

**Standard Backing:** EcoAce-Bac® Pro

**Tile Size:** 25 x 100 cm

**Pile Weight:** 21 OZ/yd<sup>2</sup>

**Total Thickness:** 8.5 ± 0.5 mm


**Piece per carton:** 20 pieces

**Anti-microbial:** Ultra Fresh (Available)


## Performance Specifications

	Test Code	Standard	Test Result
<b>Flammability Tests</b>			
Radiant Panel	ASTM E 648	≥45 watt/cm <sup>2</sup>	Class I
Methenamine Pill	ASTM D2859	7 out of 8	8
Smoke Density	ASTM E 662	≤ 450 DMC	≤ 450
<b>Stability</b>			
Delamination	ASTM D3936	≥ 3.0 lbc/in	No Separation
Dimensional Stability	AACHEN	≤ 0.2%	≤ 0.2%
Tuft Bind	ASTM D1335	≥ 8.0 lbs	≥ 8.0 lbs
<b>Anti-Static</b>			
Static Propensity	AATCC 134	≤ 3.5 kV	≤ 3.5 kV
<b>Colour Fastness</b>			
Light	AATCC 16 E	≥ 4-5	4-5
Rubbing/Crocking	AATCC 165	≥ 4-5	4-5
<b>Wear Tests</b>			
Castor Chair	BS EN 985	r ≥ 2.4	r = 2.8
Hexapod Drum	ASTM D5252	≥ 3-4	3
<b>Generic Tests</b>			
Nylon Carpet with EcoAce-Bac®	GLP No. : 100231		Accredited
Acoustic-Nylon	BS EN ISO 354	Absorption Coefficient-NRC	aw =0.15(H)

## Installation Methods



Ashlar



Herringbone

\*\*These given methods of installation are considered as classic solutions. However, certain cases and needs may be different, and designs will differ accordingly.

## Warranty

Lifetime Commercial Limited Warranty

[DOWNLOAD](#)

## Additional Information

- VOXFLOr uses Ultra-Fresh Antimicrobial system, which is by controlling odour and staining causing bacteria, mold and mildew growth, Ultra-Fresh antimicrobial additives help to keep products fresher, cleaner and more durable.


## Additional Files

Installation Guidelines

[DOWNLOAD](#)

Maintenance Guidelines


[DOWNLOAD](#)

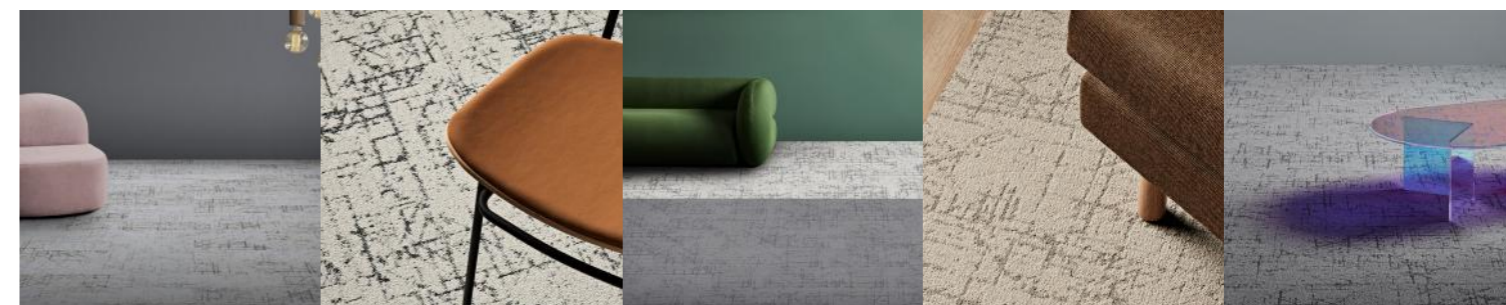

## Certifications



Declare.



CE



Certificate Of Declare

[DOWNLOAD](#)

Certificate Of Cradle To Cradle

[DOWNLOAD](#)

Certificate Of SGLS

[DOWNLOAD](#)

Certificate Of EPD

[DOWNLOAD](#)

Certificate Of CRI

[DOWNLOAD](#)




# LIGHT STREAM- SPECTRUM COLLECTION

## Technical Specifications

<b>Construction:</b> Multi-level Loop	<b>Standard Backing:</b> EcoAce-Bac® Pro
<b>Fiber:</b> ECONYL® Regenerated Nylon by Aquafil	<b>Tile Size:</b> 25 x 100 cm
<b>Gauge:</b> 1/10"	<b>Pile Weight:</b> 21 OZ/yd <sup>2</sup>
<b>Stitches:</b> 10 per inch	<b>Total Thickness:</b> 8.5 ± 0.5 mm
<b>Area per carton:</b> 5m <sup>2</sup>	<b>Piece per carton:</b> 20 pieces
<b>Traffic Classification:</b> Commercial - Heavy Duty	<b>Anti-microbial:</b> Ultra Fresh (Available)
<b>Average Pile Height:</b> 4.0 ± 0.5 mm	

## Installation Methods

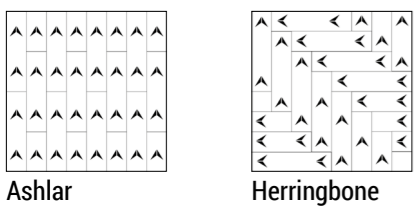

\*\*These given methods of installation are considered as classic solutions. However, certain cases and needs may be different, and designs will differ accordingly.

## Certifications

Certificate Of Declare	Certificate Of Cradle To Cradle	Certificate Of SGLS	Certificate Of EPD	Certificate Of CRI	
<a href="#">DOWNLOAD</a>	<a href="#">DOWNLOAD</a>	<a href="#">DOWNLOAD</a>	<a href="#">DOWNLOAD</a>	<a href="#">DOWNLOAD</a>	

## Performance Specifications

	Test Code	Standard	Test Result
<b>Flammability Tests</b>			
Radiant Panel	ASTM E 648	≥.45 watt/cm <sup>2</sup>	Class I
Methenamine Pill	ASTM D2859	7 out of 8	8
Smoke Density	ASTM E 662	≤ 450 DMC	≤ 450
<b>Stability</b>			
Delamination	ASTM D3936	≥ 3.0 lbc/in	No Separation
Dimensional Stability	AACHEN	≤ 0.2%	≤ 0.2%
Tuft Bind	ASTM D1335	≥ 8.0 lbs	≥ 8.0 lbs
<b>Anti-Static</b>			
Static Propensity	AATCC 134	≤ 3.5 kV	≤ 3.5 kV
<b>Colour Fastness</b>			
Light	AATCC 16 E	≥ 4-5	4-5
Rubbing/Crocking	AATCC 165	≥ 4-5	4-5
<b>Wear Tests</b>			
Castor Chair	BS EN 985	r ≥ 2.4	r = 2.8
Hexapod Drum	ASTM D5252	≥ 3-4	3
<b>Generic Tests</b>			
Nylon Carpet with EcoAce-Bac®	GLP No. : 100231		Accredited
Acoustic-Nylon	BS EN ISO 354	Absorption Coefficient-NRC	aw =0.15(H)

## Warranty


Lifetime Commercial Limited Warranty [DOWNLOAD](#)


## Additional Information

- VOXFLOr uses Ultra-Fresh Antimicrobial system, which is by controlling odour and staining causing bacteria, mold and mildew growth, Ultra-Fresh antimicrobial additives help to keep products fresher, cleaner and more durable.

## Additional Files

Installation Guidelines [DOWNLOAD](#)      Maintenance Guidelines [DOWNLOAD](#)

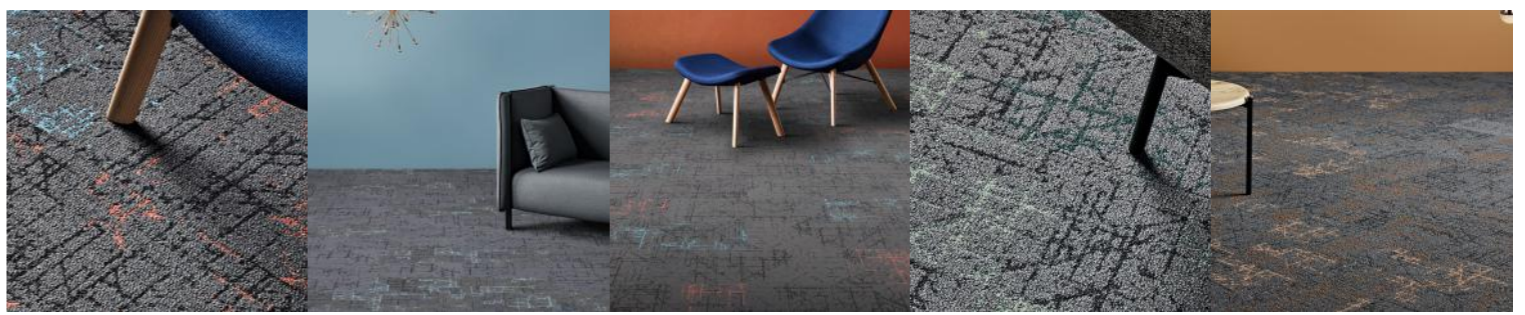

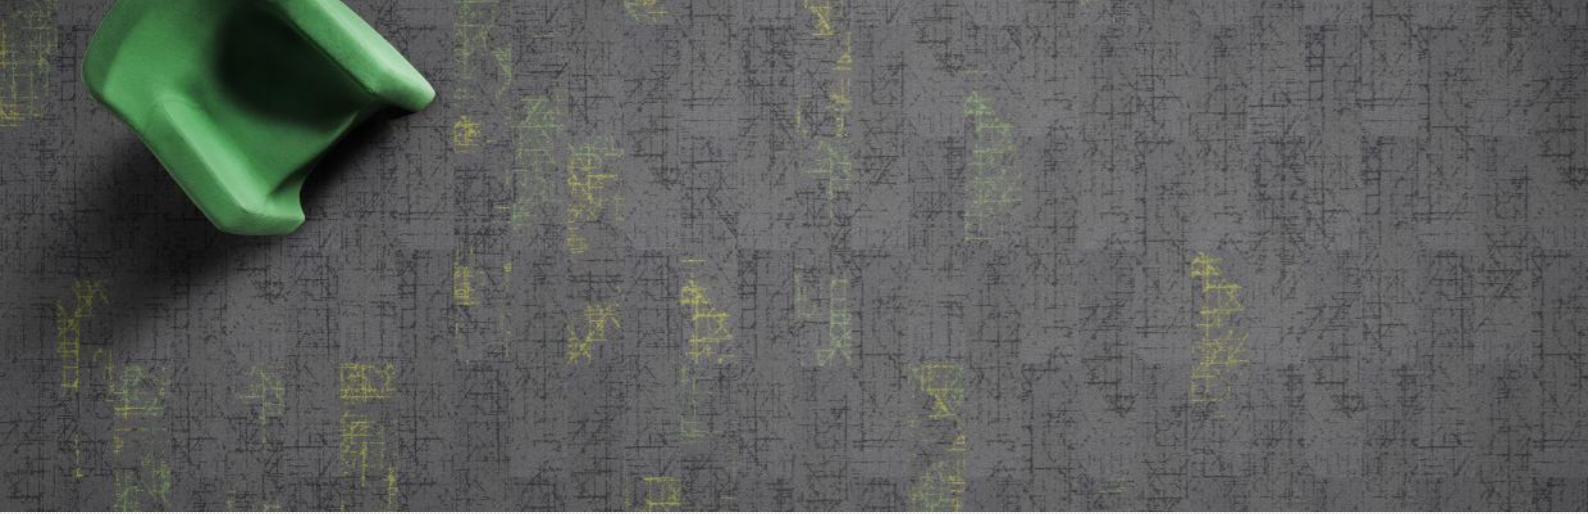

## Performance Specifications

	Test Code	Standard	Test Result
<b>Flammability Tests</b>			
Radiant Panel	ASTM E 648	≥45 watt/cm <sup>2</sup>	Class I
Methenamine Pill	ASTM D2859	7 out of 8	8
Smoke Density	ASTM E 662	≤ 450 DMC	≤ 450
<b>Stability</b>			
Delamination	ASTM D3936	≥ 3.0 lbc/in	No Separation
Dimensional Stability	AACHEN	≤ 0.2%	≤ 0.2%
Tuft Bind	ASTM D1335	≥ 8.0 lbs	≥ 8.0 lbs
<b>Anti-Static</b>			
Static Propensity	AATCC 134	≤ 3.5 kV	≤ 3.5 kV
<b>Colour Fastness</b>			
Light	AATCC 16 E	≥ 4-5	4-5
Rubbing/Crocking	AATCC 165	≥ 4-5	4-5
<b>Wear Tests</b>			
Castor Chair	BS EN 985	r ≥ 2.4	r = 2.8
Hexapod Drum	ASTM D5252	≥ 3-4	3
<b>Generic Tests</b>			
Nylon Carpet with EcoAce-Bac®	GLP No. : 100231		Accredited
Acoustic-Nylon	BS EN ISO 354	Absorption Coefficient-NRC	aw =0.15(H)

## COLOR SPARKLE- SPECTRUM COLLECTION

### Technical Specifications

**Construction:** Multi-level Loop

**Fiber:** ECONYL® Regenerated Nylon by Aquafil

**Gauge:** 1/10"

**Stitches:** 10 per inch

**Area per carton:** 5m<sup>2</sup>

**Traffic Classification:** Commercial - Heavy Duty

**Average Pile Height:** 4.0 ± 0.5 mm

**Standard Backing:** EcoAce-Bac® Pro

**Tile Size:** 25 x 100 cm


**Pile Weight:** 22 OZ/yd<sup>2</sup>

**Total Thickness:** 8.5 ± 0.5 mm


**Piece per carton:** 20 pieces

**Anti-microbial:** Ultra Fresh (Available)

### Installation Methods



Ashlar



Herringbone

\*\*These given methods of installation are considered as classic solutions. However, certain cases and needs may be different, and designs will differ accordingly.

### Warranty

Lifetime Commercial Limited Warranty

[DOWNLOAD](#)

### Additional Information

- VOXFLOr uses Ultra-Fresh Antimicrobial system, which is by controlling odour and staining causing bacteria, mold and mildew growth, Ultra-Fresh antimicrobial additives help to keep products fresher, cleaner and more durable.

### Additional Files

Installation Guidelines

[DOWNLOAD](#)

Maintenance Guidelines


[DOWNLOAD](#)



### Certifications



Declare.



CE



Certificate Of Declare

[DOWNLOAD](#)

Certificate Of Cradle To Cradle

[DOWNLOAD](#)

Certificate Of SGLS

[DOWNLOAD](#)

Certificate Of EPD

[DOWNLOAD](#)

Certificate Of CRI

[DOWNLOAD](#)