

Northern Grain | LVT

Interface®

Simplicity, elevated. Spaces, illuminated.

Sometimes, the simplest words make the strongest statement. That is also true for design. Northern Grain is bright, light and effortlessly beautiful — with a simplicity that enriches any space.

Northern Grain celebrates pale shades and clean neutrals. Invite and enhance natural light with airy off-white, beige and cream woods or set a quieter foundation with deeper soft browns and grays. The 12 colorways are divided across three subtle yet distinct woodgrain patterns. Honoring the gentle details of beech, ash and pine, each version of Northern Grain is crafted with fine lines, delicate knots and the soft ripples of cathedral peaks. With its understated and confident style, Northern Grain brings harmony to interior environments.





interface.com

Palette photography to show grain detail. Not meant for install on walls.
PRODUCT NORTHERN GRAIN **COLOR** CHIFFON OAK



PRODUCT NORTHERN GRAIN **COLOR** CHIFFON OAK **INSTALLED** HERRINGBONE





interface.com

Palette photography to show grain detail. Not meant for install on walls.
PRODUCT NORTHERN GRAIN **COLOR** ANTIQUE WASH



LVT PRODUCT NORTHERN GRAIN **COLOR** ANTIQUE WASH **INSTALLED** ASHLAR
CARPET PRODUCT THIRD SPACE™ 304 **COLOR** BLACK **INSTALLED** MONOLITHIC





Palette photography to show grain detail. Not meant for install on walls.
PRODUCT NORTHERN GRAIN **COLOR** NATURAL SATIN

[interface.com](https://www.interface.com)



LVT PRODUCT NORTHERN GRAIN **COLOR** NATURAL SATIN **INSTALLED** ASHLAR
CARPET PRODUCT FLOR KNIT WIT **COLOR** CHALK/SILVER **INSTALLED** MONOLITHIC



Specifications

Product Number	A026
4.5 mm	C011
3.0 mm	High Performance Luxury Vinyl Tile
Product Construction	Class III Printed Vinyl Tile
Class/ASTM F1700	22 mil
Wear Layer Thickness	4.5 mm and 3.0 mm options available
Total Thickness	Commercial Grade
Backing Class	Ceramor™ Coating
Finish	25 cm x 1 m (9.845 in x 39.38 in)
Nominal Dimensions	39%
Total Recycled Content	
(Pre Consumer)	
Indoor Air Quality	GREENGUARD Gold
	FloorScore® Certified
	CDPH 01350 Compliant
Environmental Certifications	NSF/ANSI 332 Silver
LEED v4	Contributes to multiple IEQ and MR credits

View the full product specification on interface.com

Installation Methods



ASHLAR



HERRINGBONE

Ready for More?

Find the latest color options, formats and full specifications on Interface.com. Create an account or login to take the next step for your project.

4.5 mm LVT



CHECK AVAILABILITY
ORDER SAMPLES

3.0 mm LVT



CHECK AVAILABILITY
ORDER SAMPLES

Northern Grain™ Color Range



4.5 mm A02601 GLAZED OAK



4.5 mm A02602 CHIFFON OAK



4.5 mm A02603 BARE OAK



4.5 mm A02604 DRIED OAK



4.5 mm A02605 NORDIC WASH



4.5 mm A02606 ANTIQUE WASH
3.0 mm C01101 ANTIQUE WASH



4.5 mm A02607 DARK WASH
3.0 mm C01102 DARK WASH



4.5 mm A02608 GREY WASH



4.5 mm A02609 AGED SATIN



4.5 mm A02610 NATURAL SATIN




4.5 mm A02611 OAK SATIN
3.0 mm C01103 OAK SATIN



4.5 mm A02612 DARK SATIN

Why Our Modular Resilient LVT?



Integrated System

Save time and look good doing it. Our LVT integrates with our full product portfolio, allowing you to streamline specification and installation. Add our modular carpet for an inset rug or nora® in an adjacent field.

For a no transition strip solution, opt for our:

- 4.5 mm LVT to any carpet tile
- 3.0 mm LVT to most 17 oz or less carpet tile on GlasBac™ or CQuest™GB backing
- 3.0 mm LVT to our nora rubber flooring



Easy Maintenance

Create a unique look that lasts. Interface LVT extends the life of your floor. From simple damp mopping to selectively replacing 4.5 mm Sound Choice LVT tiles, your flooring investment will stand the test of time - beautifully and effortlessly.



ReEntry™

Keep flooring out of the landfill. All of our LVT is produced with a controlled material stream, and 4.5 mm Sound Choice LVT can be reclaimed and recycled along with Interface carpet tile through our ReEntry program. ReEntry is the only third party certified recycling system among North American flooring manufacturers.




Noise Reduction

Silence distractions. 4.5 mm Sound Choice is a specially formulated backing for superior noise reduction, offering you best-in-class impact sound reduction and floor to floor sound transmission.




High Performance from Top to Bottom

4.5 mm Sound Choice™ LVT

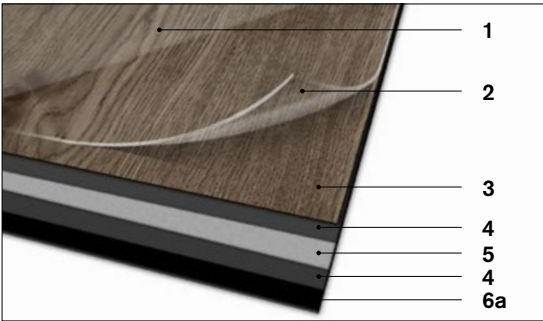

3.0 mm LVT

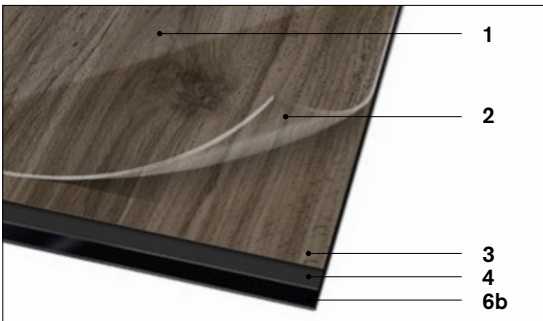

- 1. Ceramor™ Coating.** Scratch and scuff resistant, UV stabilized ceramic bead coating.
- 2. Wear Layer.** High quality, 22 mil layer enabling 15 years of resilience and performance.
- 3. Print Film.** High definition wood looks, stone looks and innovative Interface designs.
- 4. Core Sheet.** Provides stabilization and reduces telegraphing from beneath.
- 5. Fiberglass.** Adds dimensional stability and controlled flexibility.
- 6a. Sound Choice Backing.** Provides added comfort and superior acoustic performance.
- b. Backing.** Provides greater resistance to residual indentation.



Environmental Product Declaration (EPD)

A third party verified statement of product ingredients and environmental impacts over the entire life cycle of a product.



GREENGUARD Gold & FloorScore®

Meeting the highest standards for indoor air quality and assuring very low emissions of VOCs, Interface LVT is GREENGUARD Gold and FloorScore® Certified and CDPH 01350 compliant.



Health Product Declaration (HPD)

A transparency tool for evaluating if a product includes materials of concern and whether it supports Green Chemistry.



NSF/ANSI 332 Silver

This standard evaluates the environmental impact of resilient floor covering for its entire life cycle.

🖱️ Samples

Register and order samples at [interface.com](https://www.interface.com). Not near a computer? You can also request samples by calling one of the numbers below.

United States
1.877.605.1500

Canada
1.866.398.3192

interface.com

Do more on [interface.com](https://www.interface.com)

- Browse products and order samples
- Save and share favorites
- See images of products in a variety of room scenes
- Browse floor designs, change colors, upload your own image, download and share
- Get full specifications, sustainability certifications and more
- Check order status and inventory availability
- Sign up to get the latest information on Interface products and news

We have tried our very best to accurately represent product colors. However, due to the nature of printed materials, color of actual products may vary slightly. Please request a sample to see actual product color.

All product specifications reflect averages derived from product sample testing, are subject to normal manufacturing and testing tolerances and inherent pattern variances, and may be changed without notice. For more information about these and other important attributes of the product(s) described herein, including recycled content and product warranty information, please see [interface.com/disclaimer](https://www.interface.com/disclaimer).



Printed on 50% post consumer waste (PCW)
fiber manufactured using wind power.

Europe, Middle East & Africa

AE	+971 44508175
AT	+43 1 8102839
BA	+387 33 522 534
BE	+32 2 475 27 27
BG	+359 2 808 303
BY	+375 17 226 75 14
CH	+41 44 913 68 00
CZ	+42 0 233 087 111
DE	+49 2151 3718 0
DK	+45 33 79 70 55
EE	+372 6518 313
ES	+34 932 418 750
EG	+(202) 3760 7818
FR	+33 1 58 10 20 20
GR	+30 211 2120820
HR	+385 14 62 30 63
HU	+36 1 349 6545
IE	+353 1 679 8466
IL	+972 97403034
IT	+39 02 890 93678
KZ	+7 701 391 88 13
LT	+370 37 337332
LV	+371 672 18 744
NL	+31 33 277 5555
ME	+381 11 414 92 00
MK	+389 2 323 01 89
NO	+47 23 12 01 70
PL	+48 22 862 48 40
PT	+351 217 122 740
RO	+40 21 317 12 40/42/43/44
RS	+381 11 414 92 00
SA	+966 554622263
SE	+468 241 230
SK	+421 911 104 073
SI	+386 8 205 4007+
TR	+90 212 274 44 22
UA	+38(044)238 27 67
UK	+44 (0)800 3134465
ZA	+27 11 608 4270



Climate change is undeniable. And
reversible. Our mission is to prove it.
**Join the #ClimateTakeBack and
help create a climate fit for life.**