

AFTER HUMAN

LVT COLLECTION

SPECIFICATION
SHEET

VOXFLOR®
passion and purpose





AFTER HUMAN A

Technical Specifications

Total Thickness: 5mm	Backing: Loose lay
Wear Layer Thickness: 0.5mm	Piece per carton: 5 pieces
Wear Layer Treatment: UV	Area per carton: 2.09m ²
Tile Size: 45.72 x 91.44 cm	
Usage Classification: 42 Light Industrial General, 33 Commercial Heavy	

Installation Methods

		Ashlar	Herringbone
**These given methods of installation are considered as classic solutions. However, certain cases and needs may be different, and designs will differ accordingly.			

Additional Information

- All Product Specifications are averages derived from product sample testing and are subject to normal manufacturing tolerances and testing tolerances. Product Specifications may be changed without notice as long as product performance is not materially affected.

Certifications



Performance Specifications

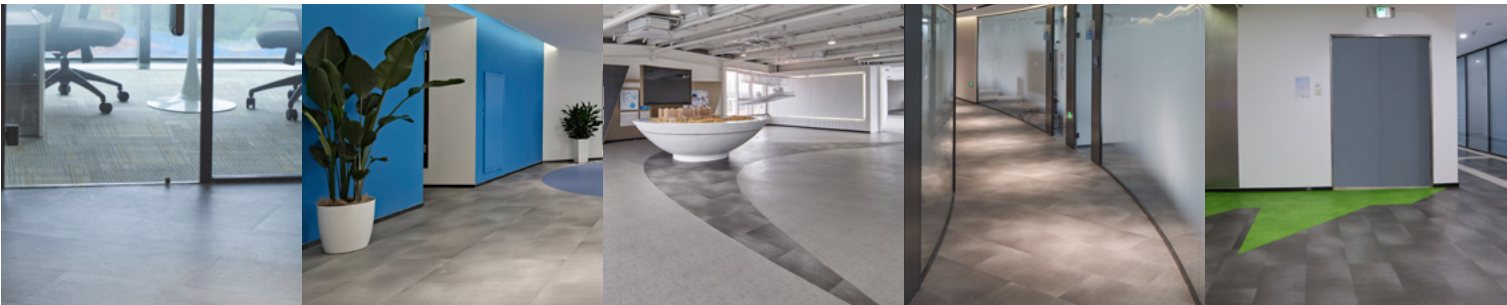
	Test Code	Standard
Flammability Test	EN13501	Bfl-S1
Slip resistance Test	EN13893:2002	DS
Formaldehyde Test	EN717-1	E1
Color Fastness to artificial light	ISO 105-B02:2014 Method 3	≥Grade 6
Residual indentation	ISO 24343-1:2007	Average value: ≤0.1mm
Dimensional stability after exposure to heat	ISO 23999:2008	≤0.25% (tiles intended for dry-joint laying) ≤0.4% (sheets and tiles intended for heat welding)
Curling after exposure to heat	ISO 23999:2008	≤2mm (tiles intended for dry-joint laying) ≤8mm (sheets and tiles intended for heat welding)
Effect of castor chair	ISO 4918:2016	After 25,000 cycles, no delamination shall occur. No disturbance to the surface other than a slight change in appearance.
Slip Resistance (Oil-wet Ramp Test)	DIN 51130:2014-02	Critical angle of inclination 13.8°. Rating: R10
Antimicrobial activity test	ASTM D 21-15	Standard practice for determining resistance synthetic polymeric materials to Fungi
Sound Absorption Coefficient	ISO 354	aw=0.05
Impact Sound Insulation	ISO 10140	ΔLlin=2 dB
Composition		PVC, DOTP, Calcium Carbonate, Fiber Glass

Warranty

Lifetime Commercial Limited **Warranty** [DOWNLOAD](#)

Additional Files

Installation & Maintenance Guidelines [DOWNLOAD](#)







AFTER HUMAN B

Technical Specifications

Total Thickness: 5mm	Backing: Loose lay
Wear Layer Thickness: 0.5mm	Piece per carton: 5 pieces
Wear Layer Treatment: UV	Area per carton: 2.09m ²
Tile Size: 45.72 x 91.44 cm	
Usage Classification: 42 Light Industrial General, 33 Commercial Heavy	

Installation Methods

		Ashlar	Herringbone
**These given methods of installation are considered as classic solutions. However, certain cases and needs may be different, and designs will differ accordingly.			

Additional Information

- All Product Specifications are averages derived from product sample testing and are subject to normal manufacturing tolerances and testing tolerances. Product Specifications may be changed without notice as long as product performance is not materially affected.

Certifications



Performance Specifications

	Test Code	Standard
Flammability Test	EN13501	Bfl-S1
Slip resistance Test	EN13893:2002	DS
Formaldehyde Test	EN717-1	E1
Color Fastness to artificial light	ISO 105-B02:2014 Method 3	≥Grade 6
Residual indentation	ISO 24343-1:2007	Average value: ≤0.1mm
Dimensional stability after exposure to heat	ISO 23999:2008	≤0.25% (tiles intended for dry-joint laying) ≤0.4% (sheets and tiles intended for heat welding)
Curling after exposure to heat	ISO 23999:2008	≤2mm (tiles intended for dry-joint laying) ≤8mm (sheets and tiles intended for heat welding)
Effect of castor chair	ISO 4918:2016	After 25,000 cycles, no delamination shall occur. No disturbance to the surface other than a slight change in appearance.
Slip Resistance (Oil-wet Ramp Test)	DIN 51130:2014-02	Critical angle of inclination 13.8°. Rating: R10
Antimicrobial activity test	ASTM D 21-15	Standard practice for determining resistance synthetic polymeric materials to Fungi
Sound Absorption Coefficient	ISO 354	aw=0.05
Impact Sound Insulation	ISO 10140	ΔLlin=2 dB
Composition		PVC, DOTP, Calcium Carbonate, Fiber Glass

Warranty

Lifetime Commercial Limited **Warranty** [DOWNLOAD](#)

Additional Files

Installation & Maintenance Guidelines [DOWNLOAD](#)







AFTER HUMAN C

Technical Specifications

Total Thickness: 5mm	Backing: Loose lay
Wear Layer Thickness: 0.5mm	Piece per carton: 5 pieces
Wear Layer Treatment: UV	Area per carton: 2.09m ²
Tile Size: 45.72 x 91.44 cm	
Usage Classification: 42 Light Industrial General, 33 Commercial Heavy	

Installation Methods

		Ashlar	Herringbone
**These given methods of installation are considered as classic solutions. However, certain cases and needs may be different, and designs will differ accordingly.			

Additional Information

- All Product Specifications are averages derived from product sample testing and are subject to normal manufacturing tolerances and testing tolerances. Product Specifications may be changed without notice as long as product performance is not materially affected.

Certifications



DOWNLOAD

Performance Specifications

	Test Code	Standard
Flammability Test	EN13501	Bfl-S1
Slip resistance Test	EN13893:2002	DS
Formaldehyde Test	EN717-1	E1
Color Fastness to artificial light	ISO 105-B02:2014 Method 3	≥Grade 6
Residual indentation	ISO 24343-1:2007	Average value: ≤0.1mm
Dimensional stability after exposure to heat	ISO 23999:2008	≤0.25% (tiles intended for dry-joint laying) ≤0.4% (sheets and tiles intended for heat welding)
Curling after exposure to heat	ISO 23999:2008	≤2mm (tiles intended for dry-joint laying) ≤8mm (sheets and tiles intended for heat welding)
Effect of castor chair	ISO 4918:2016	After 25,000 cycles, no delamination shall occur. No disturbance to the surface other than a slight change in appearance.
Slip Resistance (Oil-wet Ramp Test)	DIN 51130:2014-02	Critical angle of inclination 13.8°. Rating: R10
Antimicrobial activity test	ASTM D 21-15	Standard practice for determining resistance synthetic polymeric materials to Fungi
Sound Absorption Coefficient	ISO 354	aw=0.05
Impact Sound Insulation	ISO 10140	ΔLlin=2 dB
Composition		PVC, DOTP, Calcium Carbonate, Fiber Glass

Warranty

Lifetime Commercial Limited **Warranty** [DOWNLOAD](#)

Additional Files

Installation & Maintenance Guidelines [DOWNLOAD](#)







AFTER HUMAN D

Technical Specifications

Total Thickness: 5mm	Backing: Loose lay
Wear Layer Thickness: 0.5mm	Piece per carton: 5 pieces
Wear Layer Treatment: UV	Area per carton: 2.09m ²
Tile Size: 45.72 x 91.44 cm	
Usage Classification: 42 Light Industrial General, 33 Commercial Heavy	

Installation Methods

		**These given methods of installation are considered as classic solutions. However, certain cases and needs may be different, and designs will differ accordingly.
Ashlar	Herringbone	

Additional Information

- All Product Specifications are averages derived from product sample testing and are subject to normal manufacturing tolerances and testing tolerances. Product Specifications may be changed without notice as long as product performance is not materially affected.

Certifications



Performance Specifications

	Test Code	Standard
Flammability Test	EN13501	Bfl-S1
Slip resistance Test	EN13893:2002	DS
Formaldehyde Test	EN717-1	E1
Color Fastness to artificial light	ISO 105-B02:2014 Method 3	≥Grade 6
Residual indentation	ISO 24343-1:2007	Average value: ≤0.1mm
Dimensional stability after exposure to heat	ISO 23999:2008	≤0.25% (tiles intended for dry-joint laying) ≤0.4% (sheets and tiles intended for heat welding)
Curling after exposure to heat	ISO 23999:2008	≤2mm (tiles intended for dry-joint laying) ≤8mm (sheets and tiles intended for heat welding)
Effect of castor chair	ISO 4918:2016	After 25,000 cycles, no delamination shall occur. No disturbance to the surface other than a slight change in appearance.
Slip Resistance (Oil-wet Ramp Test)	DIN 51130:2014-02	Critical angle of inclination 13.8°. Rating: R10
Antimicrobial activity test	ASTM D 21-15	Standard practice for determining resistance synthetic polymeric materials to Fungi
Sound Absorption Coefficient	ISO 354	aw=0.05
Impact Sound Insulation	ISO 10140	ΔLlin=2 dB
Composition		PVC, DOTP, Calcium Carbonate, Fiber Glass

Warranty

Lifetime Commercial Limited **Warranty** [DOWNLOAD](#)

Additional Files

Installation & Maintenance Guidelines [DOWNLOAD](#)





VOXFLOR®

www.voxflor.com

Shanghai **Headquarters**

T +86 21 62989325

Milano Creative Studio

T +39 3885863150

China **Branch Offices**

Beijing/ Guangzhou/ Shenzhen/ Xiamen

